

SecurProx 125kHz ISO Proximity Cards with MagStripe Ordering Form

Card Model **SecurProx 125kHz 26-bit ISO Proximity Cards with Magnetic Stripe**

Part Numbers *SP-26ProxMag, SP-26ProxMagComp*

Programming

L - Programmed, Low Frequency (125kHz). Stet.

Front Packaging

G - Plain White PVC w/ Gloss Finish

Back Packaging¹


G - Plain White PVC w/ Gloss Finish

Card Numbering^{2,3} (Choose)

- M** - Sequential Matching Internal/External (Inkjetted)
- N** - No External Card Numbering
- S** - Sequential Internal/Sequential Non-Matching External (Inkjetted)

Slot Punch⁴ (Choose)

- N** - Non Slot Punch (Printed location of vertical and horizontal slot punch will remain)
- V** - Vertical Slot Punch (Printed location of horizontal slot punch will remain)
- H** - Horizontal Slot Punch (Printed location of vertical slot punch will remain)

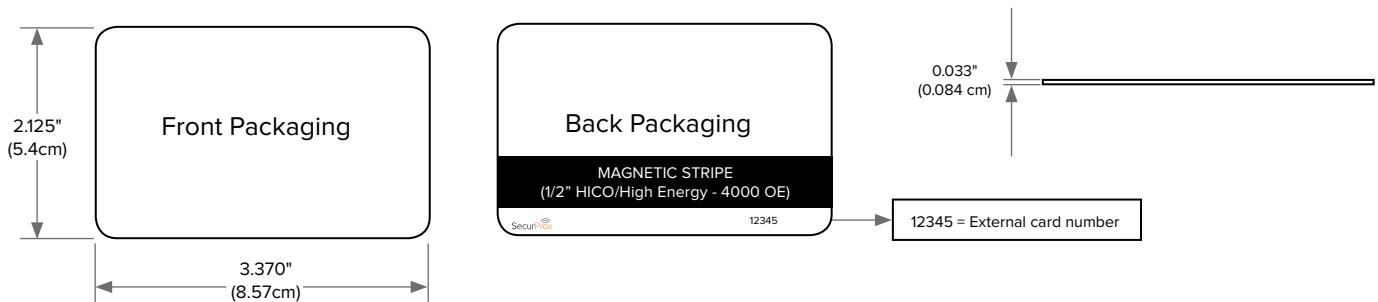

Final Part Configuration **LGG** (Refer to Options Above)

26-bit, 125kHz Card Programming Information

Facility Code _____

Internal Card Start Number _____

External Card Start Number (if non-matching) _____

1. Cards will have a small SecurProx logo SecurProx, and card number printed in the lower left-hand corner, and slot punch guides printed on the back of the card.
2. The external card number is placed in the bottom right-hand corner on the back of the card.
3. Programmed as a sequential 12-digit number.
4. Cards are provided with an optional slot punch at no additional charge. Some card printers cannot accommodate pre-slot punched cards. Consult with your Account Manager prior to ordering.